
Smart Lock Motor GM65ED

Request a Quote

Name WhatsApp CAPTCHA Submit

2.018712s

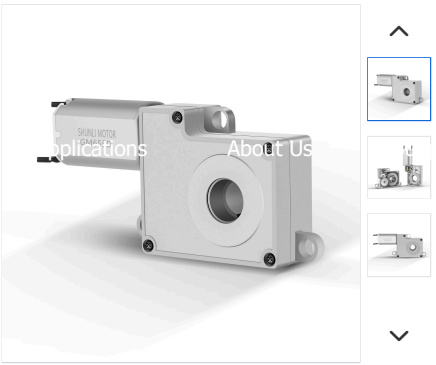

Smart Lock Motor GM65ED

Main Applications

Smart Door Locks

Drive for latch / bolt transmission mechanisms requiring compact packaging, low-voltage operation and repeatable opening/closing motion.

Electronic Cabinet & Locker Locks

Suitable for compact electromechanical locking mechanisms where installation space and controlled actuation are important.

Hotel / Access-Control Lock Mechanisms

Can be evaluated for lock-body actuation requiring repeated cycles and consistent low-voltage drive performance.

Customized Locking Mechanisms

For non-standard lock bodies, the motor, ratio, pinion/interface, lead wire and terminal can be evaluated against the customer's mechanism and test standard.

FAQ

Q1. How can noise be reduced in a smart lock gear motor?

Low-noise performance depends on motor speed, gear material and accuracy, gear ratio, backlash, lubrication, assembly consistency, lock-body resonance, and the control profile. For reliable evaluation, noise should be tested in the actual smart lock mechanism, including startup, running, reversing, and end-position impact, rather than relying only on no-load motor noise.

Q2. Can a smart lock motor still provide enough torque when the battery is low?

Yes, but the motor and gearbox must be selected based on the minimum operating voltage of the battery, not only the rated voltage. Low-voltage testing should simulate real conditions such as increased latch friction, door pressure, low tempera repeated unlock

to verify starting current, unlocking time, torque margin, and temperature rise.

Q3. How should stall or jam protection be handled in a smart lock motor system?

Stall protection should be handled by the motor, lock mechanism, and control system together. Common methods include current detection, operation timeout, end-position detection, reverse recovery, mechanical limits, and fault alarms. Peak current and stall duration should also be controlled to reduce the risk of motor overheating or mechanical damage.

Q4. How do I place an order with Shunli Motor?

Please send us your application requirements or motor specifications. Our engineering team will develop a suitable solution, confirm the technical details, and provide samples for evaluation. Once the samples are approved, we will arrange mass production. Shipping methods can be selected based on your delivery requirements.

Contact Us

Share:

Inquire Now

Next Product

Product Overview

High-Torque DC Gear motor for Smart Lock & Electronic Lock Mechanisms The GM65ED Smart Lock Motor is a compact DC gear motor engineered for smart door locks, electronic locks, access-control mechanisms, and other powered locking systems requiring high torque and controlled low-speed motion. The supplied 8 VDC reference configuration uses a 1:97 gear ratio, delivering 65 RPM rated output speed and 0.48 N·m (4.8 kgf·cm) rated torque, with 2.5 N·m (25 kgf·cm) stall torque. Its 58 × 65 mm gearbox layout, Ø28 mm DC motor, and integrated mounting features support space-efficient installation in smart lock bodies and actuator modules.

Model Information

Model	Motor Type	Product Category

Request a Quote

2.018712s

GM65ED	DC Brushed Gear motor	Smart Lock / Electronic Lock Motor

Contact Us

Main Parameters

Technical Data

Rated Voltage (reference performance table)	8 VDC
Gear Ratio	1:97
Gearbox Efficiency	30%–40%
Max. Rated Gearbox Torque	15–25 kgf·cm
Max. Gearbox Break Torque	30–50 kgf·cm
Gearbox Body Size Shown	58 × 65 × 23.8 mm
Motor Diameter	Ø28 mm
Overall Length Shown	121 mm

Technical Data

Gearmotor Model	Ratio	Voltage	No-Load Speed	No-Load Current	Rated Speed	Rated Current	Rated
GM65E	1:97	8 VDC	77 RPM	≤ 280 mA	65 RPM	≤ 1500 mA	0.4 N· 4.8 kg

Technical Data


Gearbox body dimensions shown	58 × 65 × 23.8 mm
Motor diameter	Ø28 mm
Overall length shown	121 mm
Mounting holes	3 × Ø5.1 ± 0.1 mm
Output interface diameter	Ø16 +0.1/0 mm
Secondary interface diameter	Ø13 +0.1/0 mm
Lead wire shown	UL1007 22AWG, red / black, 260 ± 10 mm
Connector / rotation reference	PH2.0-2P / CCW

Dimension Drawing


Request a Quote

2.018712s

Contact Us

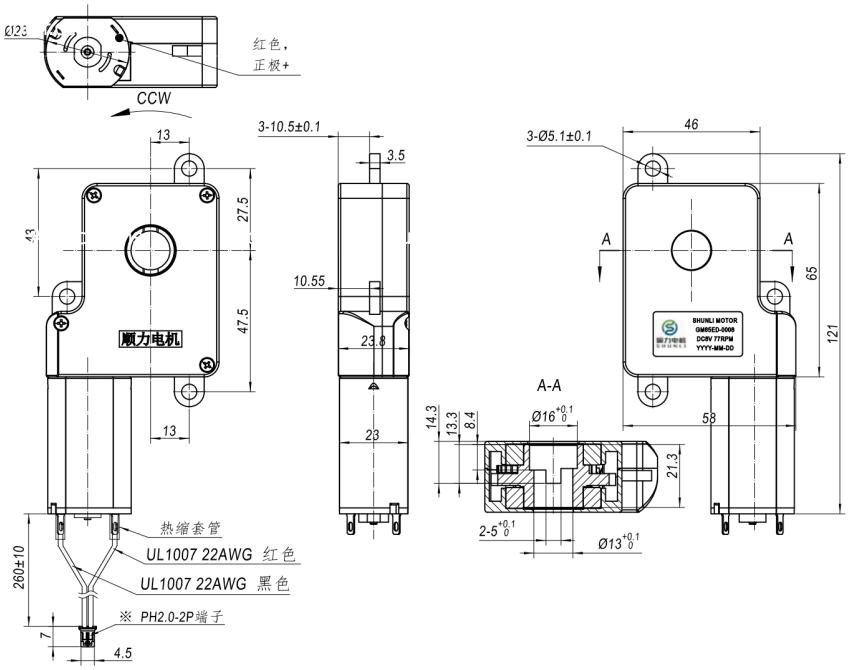

Main Applications

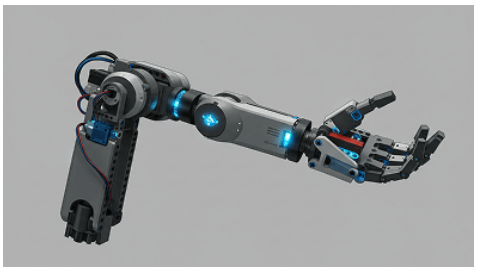

Industrial Automation

Industrial valves, dampers, gates, low-speed rotary platforms, adjustment mechanisms, and



Industrial Automation

Industrial valves, dampers, gates, low-sp
rotary platforms, adjustment mechanisms

Customization Range

- Electrical Configuration
- Working voltage / winding configuration, rotation direction, lead wire length and terminal options.
- Performance Matching
- Gear ratio, target output speed, rated load point, current limit and torque margin based on the real lock mechanism.
- Mechanical Interface
- Output pinion / shaft interface, mounting features and connection to the customer's lock-body transmission.
- Noise & Reliability
- Gear meshing, backlash, lubrication, motor operating point, assembly consistency and complete-lock resonance optimization.
- Control / Feedback Integration

Request a Quote

2.018712s

Hall sensor, encoder or other feedback functions can be evaluated when required by the project; availability depends on the final structure and specification.

FAQ

Applications About Us Support News

Q1: What types of projects are best suited to the GM58EM DC Worm Gear Motor?


Yes. Provide the product structure, space, load, and motion requirements, and our engineering team can assist with parameter conversion and solution evaluation.

Q2: What types of projects are best suited to the GM58EM DC Worm Gear Motor?

Q3: What types of projects are best suited to the GM58EM DC Worm Gear Motor?

Q4: What types of projects are best suited to the GM58EM DC Worm Gear Motor?


Contact Us

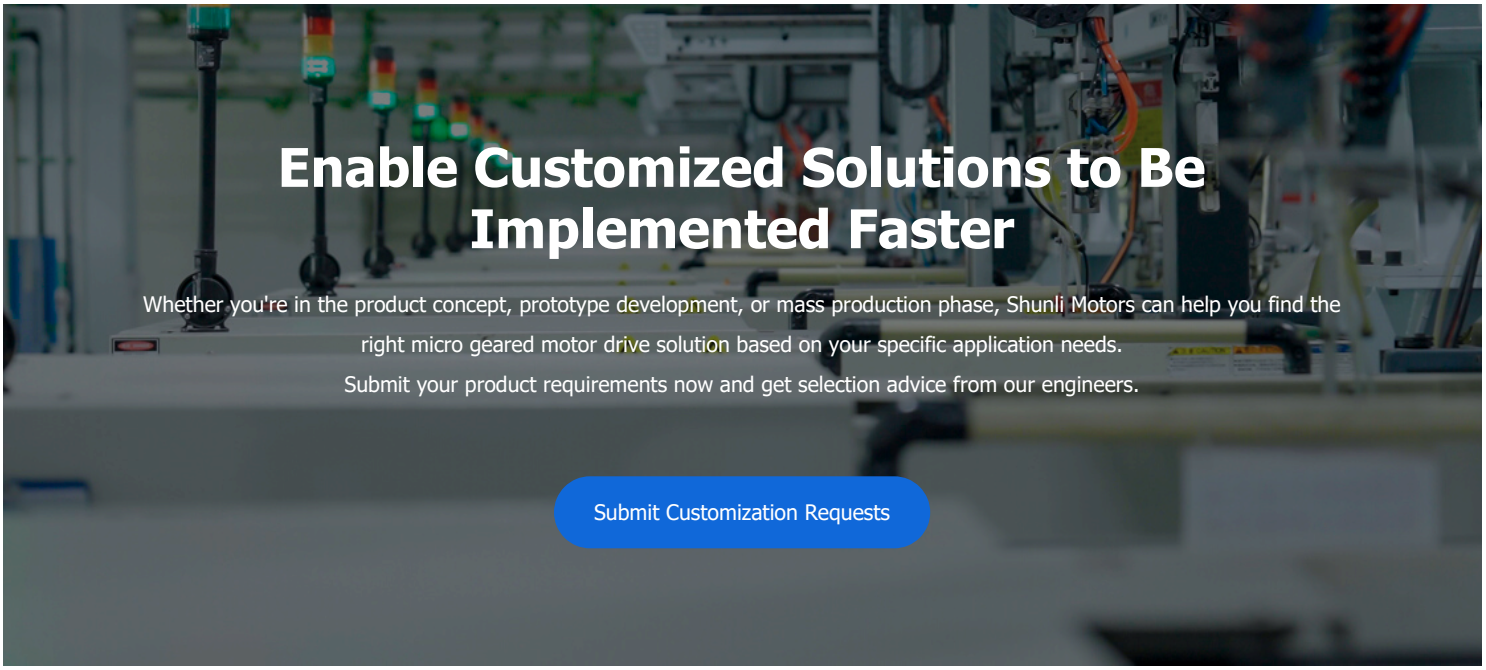

Related Products

Request a Quote

2.018712s

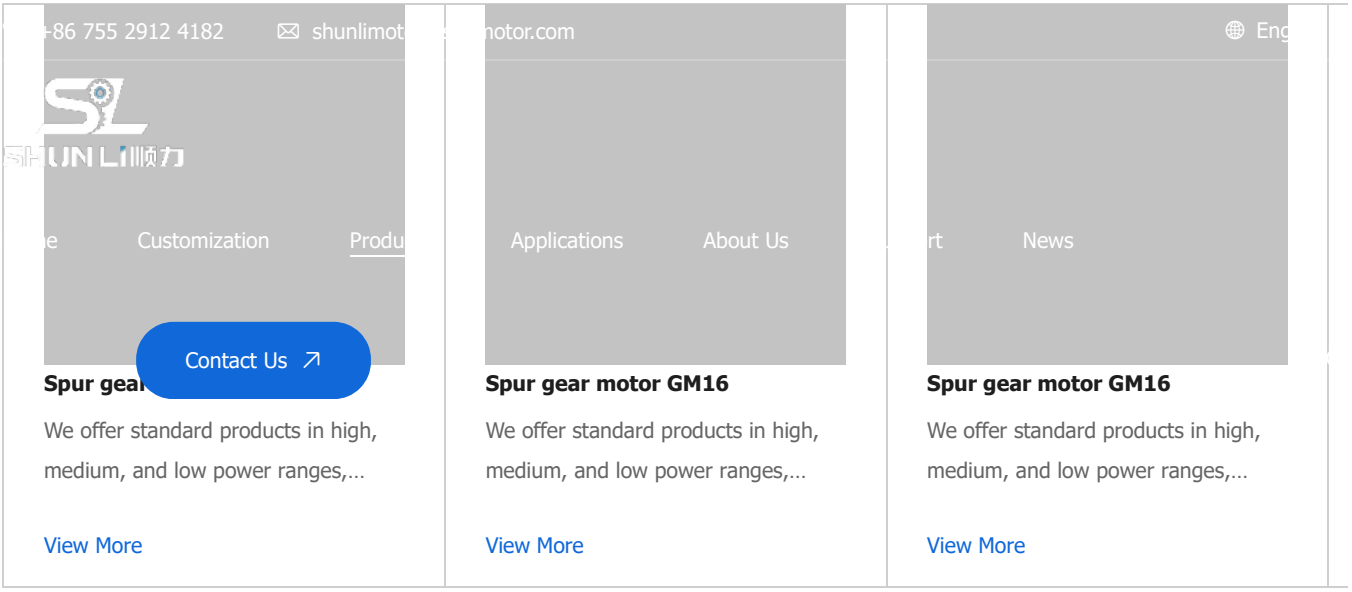

Navigation

- Home
- Customization
- Products
- Applications
- About Us
- Support
- News
- Contact Us

Product Categories

- Brushed Gear Motor
- Brushless Gear Motor
- Coreless Gear Motor
- AC Shaded Pole Gear Motor
- Smart Lock Motor

Contact Us

Tel.: +86 755 2912 4182

+86 189 2746 6971

E-mail: shunlimotor@szslmotor.com

WhatsApp: +86 18927467041

Get in Touch

* E-mail

* Message

* Submit

Copyright @ Shenzhen Shunli Motor Co., Ltd. All Rights Reserved | Powered by Reanod

Request a Quote

2.018712s