Spur Gear Motor GM37BM3530

Request a Quote
Name
WhatsApp
CAPTCHA
Submit
2.021610s

PRODUCT CATEGORIES

- Brushed Gear Motor
  - Spur Gear Motor
  - Planetary Ge
  - DC Worm Gea
- Brushless Gear Motor
- Coreless Gear Motor
- AC Shaded Pole Gear Motor
- Smart Lock Motor

Contact Us



Spur Gear Motor GM37BM3530

Main Applications

Smart Agriculture & Gardening

Electric pruning tools, automatic feeding equipment, small irrigation devices, spraying equipment, quantitative feeding, rotary adjustment and automatic opening/closing mechanisms.

Focus: Evaluate dust/moisture exposure, startup resistance, jam conditions, gear material, lubrication and product-level sealing in the real equipment.

Automotive Electronics

Automotive door locks, charging-port covers, HVAC air flaps, hidden door handles and other small opening/closing mechanisms.

Focus: Validate high/low-temperature start, vibration, stall, noise, duty cycle and batch consistency according to the customer project standard.

Smart Home

Smart door locks, electric curtains, window openers, smart blinds, automatic soap dispensers, smart bins and compact appliance actuators.

Focus: Balance noise, power consumption, startup current, speed, torque, package size and repeated-cycle reliability.

Medical Equipment

Electronic blood pressure monitors, drug-dispensing equipment, sample transport mechanisms, medical valves and compact rotate/push-pull/open-close/quantitative actuators.

Focus: Evaluate noise, vibration, temperature rise, duty cycle, stall protection and batch consistency inside the actual device.

AI Robots

Service-robot grippers, hatches, feeding mechanisms, cleaning modules and light-load joints.

Focus: For frequent start-stop or reversing, verify gear impact, wear, backlash, lu output-shaft loading and cycle life.

Request a Quote

2.021610s

Contact Us

Industrial Automation

Small conveyors, feeders, sorting mechanisms, labeling equipment, automatic fixtures and inspection equipment.

Focus: Separate continuous, starting and peak torque requirements; match motor, ratio and stage count to the actual cycle rather than applying one generic safety factor.

Commercial / Office Equipment

Coffee machines, printers, copiers, smart lockers and ticketing equipment for feeding, dispensing, opening/closing, locking and transmission.

Focus: Evaluate jam/stall peak torque, noise, cycle life and recovery logic while controlling package size and cost.

Custom Drive Applications

Non-standard small transmission mechanisms where standard voltage, speed, ratio, shaft, mounting or motor configuration does not fit.

Focus: Re-match motor, ratio, stage count, output shaft and operating point to the customer mechanism and validation target.

FAQ

Q1. What applications are spur gear motors best suited for?

Spur gear motors are well suited for small drive systems with relatively stable loads where efficiency, cost, simple structure, and reliable mass production are important. Typical applications include feeders, small conveyors, opening and closing mechanisms, dispensing systems, smart home devices, medical equipment, industrial automation, and commercial equipment.

Q2. How do I select the right spur gear motor for my application?

Motor selection should be based on the operating voltage, target output speed, continuous torque, starting torque, peak torque, gear ratio, installation space, duty cycle, and operating environment. For applications with jamming, frequent start-stop, or reversing, the actual load profile should also be evaluated rather than selecti tor based only or no-load spe pment weight.

Request a Quote

2.021610s

Contact Us

Q3. How can noise and vibration be reduced in a spur gear motor?

Noise and vibration can be reduced by optimizing motor speed, gear accuracy, gear material, backlash, lubrication, assembly tolerances, and mounting structure. Because the final enclosure can amplify resonance, low-noise performance should be validated in the complete customer mechanism rather than relying only on motor no-load noise.

Q4. How should stall, overload, and frequent start-stop conditions be evaluated?

Continuous torque, starting torque, peak torque, stall current, and operating time should be evaluated separately. For applications that may jam or overload, current detection, operation timeout, reverse recovery, or mechanical protection can help reduce the risk of overheating and gear damage. Frequent start-stop and reversing applications should also be validated for gear wear, backlash, temperature rise, and service life.

Q5： How do I place an order with Shunli Motor?

Please send us your application requirements or motor specifications. Our engineering team will develop a suitable solution, confirm the technical details, and provide samples for evaluation. Once the samples are approved, we will arrange mass production. Shipping methods can be selected based on your delivery requirements.

Share:

Inquire Now

Next Product

Product Overview

The GM37BM is a DC spur gear motor delivering a compact structure, low-speed output, and high torque with flexible gear-ratio options. It is a reliable drive solution for smart home devices, electronic locks, medical equipment, robots, pet products, small automation systems.

Request a Quote

2.021610s

Model Information

Reference Model	Motor	Ratio	Rated Voltage	Product Category
GM37BM3525-168K	SL-3525	1:168*	12 VDC	DC Spur Gear Motor
GM37BM3530-393K	SL-3530	1:393*	24 VDC	DC Spur Gear Motor
GM37BM3540-90K	SL-3540	1:90*	12 VDC	DC Spur Gear Motor

Contact Us

Gearmotor Model	Ratio	Rated Voltage (V)	No-Load Speed (RPM)	No-Load Current (mA)	Rated Speed (RPM)	Rated C (mA
GM37BM3525-168K	1:168*	12 VDC	23.5	<100	19.5	
GM37BM3530-393K	1:393*	24 VDC	15	<100	13	
GM37BM3540-90K	1:90*	12 VDC	100	<200	80	<10

Item	Reference
Gearbox Diameter	Ø37 mm
Gearbox Length A	Per drawing
PMDC Motor Diameter	Ø35 mm Max
Output Shaft	Customizable by project
Mounting Interface	Per drawing

PMDC Motor Model	Motor Length B (mm)	Rated Voltage (V)	No-Load Speed (RPM)	No-Load Current (mA)	Rated Speed (RPM)	Rated Current (mA)	Ra Tor mN gf
SL-3525 124000	25	12 VDC	4000	<40	3300	<120	2 / 2
SL-3530 246000	30	24 VDC	6000	<45	5200	<250	0 / 7

Request a Quote

2.021610s

SL-3540 129000	40	12 VDC	9000	<150	7950	<950	/


Main Parameters

Contact Us

Dimension Drawing

Contact us for the dimension drawing of this model.

Main Applications

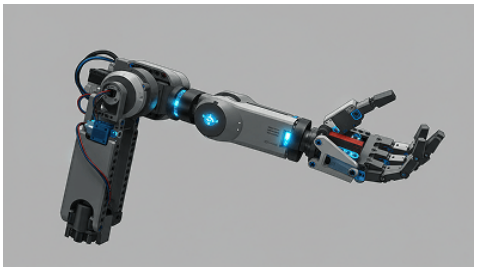

Industrial Automation

Industrial valves, dampers, gates, low-speed rotary platforms, adjustment mechanisms, and



Industrial Automation

Industrial valves, dampers, gates, low-sp rotary platforms, adjustment mechanisms

Customization Range

- Gear Ratio & Stage Count
- Select the appropriate 2- to 7-stage gearbox configuration and evaluate the final ratio against target speed, torque, efficiency, noise, life, and package-length requirements. Gearbox length A must be confirmed from the selected stage count.
- Motor Configuration
- Motor parameters can be evaluated around the supplied SL-3525, SL-3530, and SL-3540 PMDC motor references. Project-specific voltage, operating point, and matching requirements should be confirmed through engineering evaluation and sample validation.
- Output Shaft
- Output-shaft and mechanical-interface customization can be evaluated from the customer interface drawing. Provide shaft geometry, length, flat/thread feature, tolerance, radial/axial load, and mating-interface requirements.
- Performance Matching
- Output speed, torque and current should be matched to the actual continuous/start/peak load and duty cycle. A target RPM alone is insufficient for reliable selection.
- Gear / Lubrication Optimization

Request a Quote

2.021610s

For noise, life, start-stop or environmental requirements, gear material, meshing condition and lubrication can be evaluated as part of the project solution.

Wiring / Interface

Lead wire and terminal/interface requirements can be evaluated from drawings, samples and assembly constraints.

Validation & Mass Production

Sample-stage validation can cover speed, current, torque, noise, temperature rise, stall/jam behavior, cycle life and installation fit; pilot production should confirm process capability and batch consistency.

Contact Us

FAQ


Q1: What types of projects are best suited to the GM58EM DC Worm Gear Motor?

Yes. Provide the product structure, space, load, and motion requirements, and our engineering team can assist with parameter conversion and solution evaluation.

Q2: What types of projects are best suited to the GM58EM DC Worm Gear Motor?

Q3: What types of projects are best suited to the GM58EM DC Worm Gear Motor?

Q4: What types of projects are best suited to the GM58EM DC Worm Gear Motor?

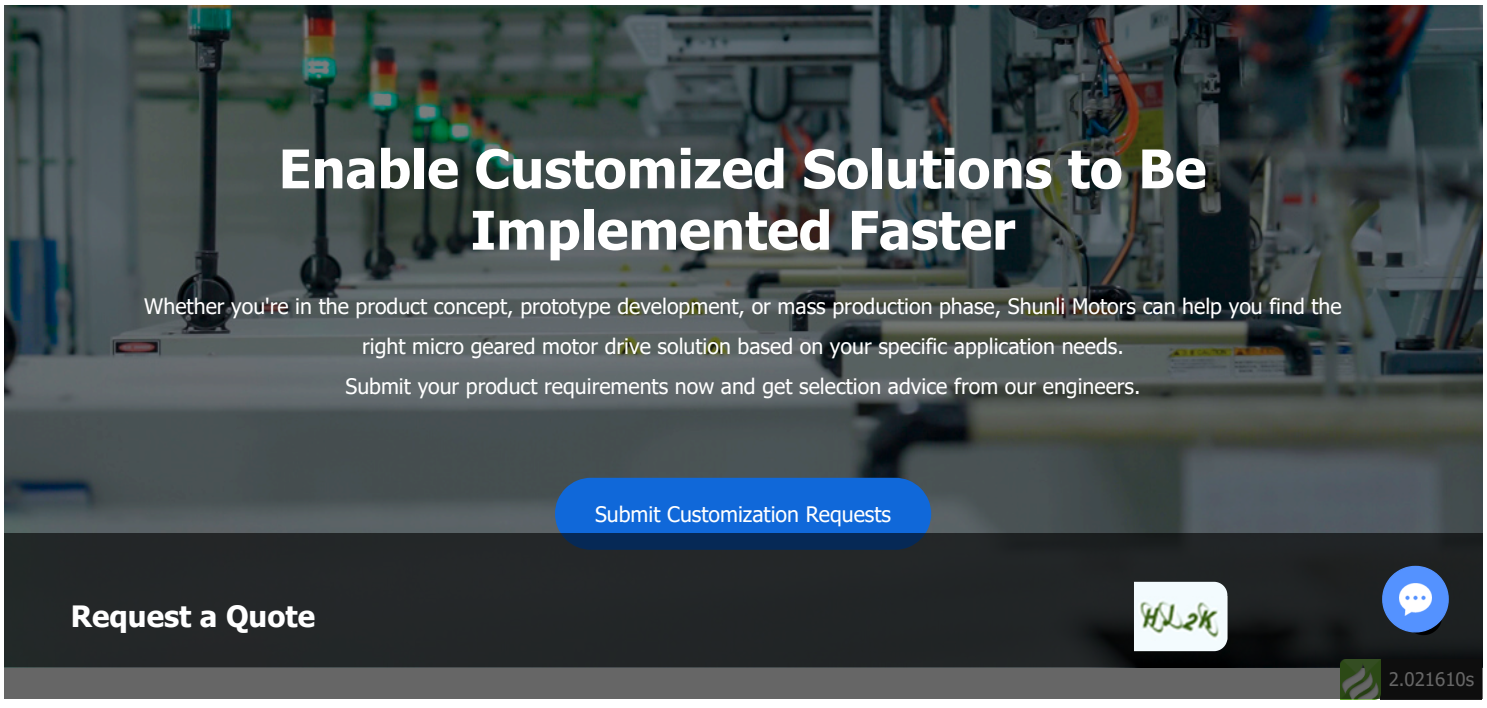

Enable Customized Solutions to Be Implemented Faster


Whether you're in the product concept, prototype development, or mass production phase, Shunli Motors can help you find the right micro geared motor drive solution based on your specific application needs.
Submit your product requirements now and get selection advice from our engineers.

Submit Customization Requests

Request a Quote

2.021610s

Related Products

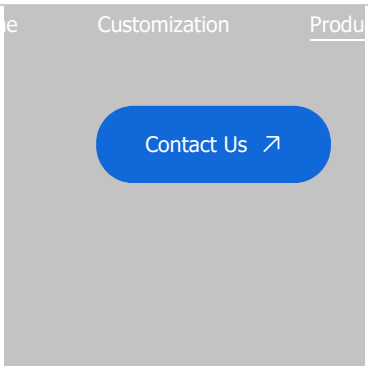

Spur gear motor GM16

We offer standard products in high, medium, and low power ranges,...


View More



Spur gear motor GM16

We offer standard products in high, medium, and low power ranges,...

View More

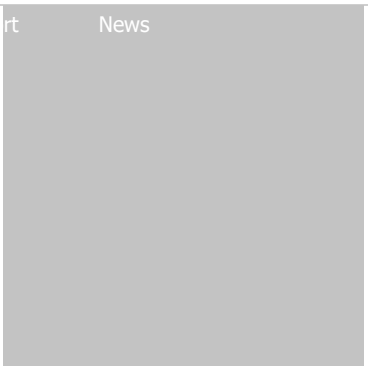

Spur gear motor GM16

We offer standard products in high, medium, and low power ranges,...

View More

Contact Us

Tel.: +86 755 2912 4182
+86 189 2746 6971
E-mail: shunlimotor@szslmotor.com
WhatsApp: +86 18927467041

Get in Touch

* E-mail

* Message

* Submit

Copyright @ Shenzhen Shunli Motor Co., Ltd. All Rights Reserved | Powered by Reanod

Request a Quote

2.021610s